

The peripherals shown are just a sample of the vast range of sensors, detectors and other wireless peripherals available from Rosslare Security.

System Peripherals:


Wireless Motion Detectors



Wireless Smoke and Heat Detectors



Wireless Remote Control, Emergency Button & Keypad

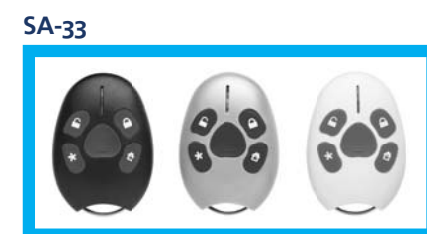

Wireless Keyfob with Emergency Button



Wireless Waterproof Emergency Button

Wireless Magnetic Contacts



Wireless Vibration Detector

Compact Cylindrical Wireless Magnetic Contact and Shock Sensor

ELECTRICAL SPECIFICATIONS

- DC input power
- Current consumption
- RF frequency
- Internal sounder output
- Antenna type
- Backup battery type

OPERATIONAL SPECIFICATIONS

- Zones
- Zone types
- User interface
- Onboard PGM outputs
- Tamper protection
- RF jamming detection
- Programmable no-activity timer
- Aux output
- Modem speed
- PC Upload/Download Customer Management SW
- Reporting format
- User codes

ENVIRONMENTAL SPECIFICATIONS

- Operating environment
- Operating temperature
- Operating humidity
- RFI protection

PHYSICAL SPECIFICATIONS

- Dimensions L x W x D
- Weight

| HLX-40 | HLX-40A | HLX-40B |
|--|---------|---------|
| 13.8 VDC @ 800 mA from transformer | | |
| Standby: 120 mA | | |
| Maximum: 350 mA | | |
| 433.92 MHz (G-series), 868.35 MHz (H-series) | | |
| 87 dBA @ 1 m (3.28 ft) | | |
| Dual-diversity antenna | | |
| 12VDC SLA, BT-05, 800mAh or BT-16: NiMH 12VDC, 2Ah | | |

| |
|--|
| 40 zones: 39 wireless, one hardwire with tamper input |
| Interior, perimeter, delay, fire, 24Hr silent and audible, chime (non-alarm) |
| 16-key backlit keypad and LCD (two lines of 16 characters), speaker, mic, two LED indicators |
| 2x 200mA, fully programmable (on/off/toggle/timed) |
| Wall removal detection |
| YES |
| 1-30 minutes, per zone |
| 12 VDC, 500 mA (maximum) |
| 2400 Baud |
| YES, Using MD-62 cable connection or via the modem from remote PC |
| Contact ID |
| 22 codes - 1 Installer, 1 Master and 20 users |

| |
|---------------------------|
| Indoor use |
| 0° to 60°C (32° to 140°F) |
| 0 to 85% (non-condensing) |
| > 20 V/m up to 1000 MHz |

| | HLX-40 | HLX-40A | HLX-40B |
|----------------------|--|--|--|
| Dimensions L x W x D | 217 x 144 x 48 mm 8.54 x 5.6 x 1.9 inch | 217 x 144 x 50 mm 8.54 x 5.6 x 1.9 inch | 217 x 144 x 48 mm 8.54 x 5.6 x 1.9 inch |
| Weight | 520 g (1.14 lbs) | 548 g (1.21 lbs) | 530g (1.17 lbs) |

For more information, please contact your local Rosslare office

North America Sales & Support: info.na@rosslaresecurity.com

Europe Sales & Support: info.eu@rosslaresecurity.com

APAC, Middle East & Africa: info.apacme@rosslaresecurity.com, China: info.cn@rosslaresecurity.com, India: info.in@rosslaresecurity.com


Latin America & Caribbean: info.la@rosslaresecurity.com



Advanced Burglar & Fire Alarm



- The Flexibility to Conveniently Install All System Elements
- The Innovation of The Latest In Security Technology
- The Elegance and Finesse From an Award Winning Designer



5504-0024301-00



Complete 2-way voice and listen-in capabilities, allows voice-guided messaging and control options

The Freedom to Feel Safe in Your Own Home

Wouldn't you like to feel safe & secure in your own home when in, as well as when away?

With HomeLogiX™ you can be confident that your family is protected and your home's security is in good hands. In case of an alarm, the system will immediately connect with a central station using 2-way audio communication for immediate response personnel. The panel's built-in voice dialer can also report alarms and other irregular system events to any private phone (up-to 3 numbers), land-line or cellular, via a voice message or text notification (menu option). Panic, emergency, duress, and silent alarm options are easily available at the touch of a button (from the main panel, or key-fob) initiating a 2-way audio communication so you can freely communicate hands-free.

Flexible, fully programmable 2 PGM automation features

Want an intrusion alarm system that will work for your business?

HomeLogiX™'s wireless communication supports a built-in keypad, internal and external sound system, and a two-line backlit LCD, that in addition to 40 zones (39 wireless and one hardwired), four remote keypads, four wireless repeaters, four wireless sirens, and eight remote controls, as well as 2-way RF products complete the solution for maximum peripheral security.



KE-30 – Battery Operated 2-Way Wireless Keypad



MD-CC101 – GSM Stick – GSM Communicator module for HomeLogiX panels

Furthermore, HomeLogiX™'s wireless communication option ensures that if the phone line is cut, the system is not compromised eliminating a would-be intruder's ability to disable communication by cutting the home's phone or cable lines. Anti-masking capabilities of our PIR sensors and advanced Tamper prevention complete the solution against compromising of the system.

capabilities of our PIR sensors and advanced Tamper prevention complete the solution against compromising of the system.

Built-in PSTN, 2400 baud dialer/modem and Optional GSM reporting module expansion



The Freedom to Remotely Control and Monitor Your Home and Office



HomeLogiX™ introduces an exclusive interactive voice menu for monitoring and control capabilities by obtaining information about the system anytime from any remote phone. Once an incoming or outgoing call is initiated, HomeLogiX™ provides the user with a voice menu enabling remote services such as arming/disarming, status reports, two-way voice and listen-in, text messaging, and appliance control. An optional cellular module can be added to the system for complete security and communication options.

Designed for home automation comfort and control, the system offers flexible, fully programmable PGM automation features, including the re-programming of transmitter button functions.

40 zones, 22 access codes, 3 arming types and 4 Arming methods

Self-Sustained and Wire Free



As intrusion alarm systems become a household necessity, most wireless burglar alarms are now able to provide reliable protection, without the havoc and expense of running wires.

Offering the latest in security technology, the HomeLogiX™ family of advanced burglar and fire alarm wireless solution, have all the benefits of advanced wireless technology, enclosed in a compact, aesthetic, easy-to-use control panel. All compatible accessories such as keypads, detectors, sensors and other peripherals are conveniently installed around your home or office, with the flexibility to add, remove, or change their location as desired.



Complete HomeLogiX solutions

Security Made Simple Compact & Simple

HomeLogiX™ makes it easy to take advantage of a complete wireless alarm system with 40 wireless zones as well as accessories that are independent of the zones such as repeaters, wireless sirens, keypads, and transmitters, all in a compact and elegantly designed housing.

Easy Operation

Want an intrusion alarm system that will work for you?

HomeLogiX™ easy to operate system will not take up any valuable time to install, nor will it require extensive remodeling for wiring and connection, in addition it's easy to use functionality will prevent delays upon entry or exit of the premises.

Easy to configure, set up and use, the straightforward, extremely easy system installation and operation does not even require you to consult the user manual for most applications and normal use as it is derived from a simple menu-driven settings option.

The HomeLogiX™ has a clear straightforward menu structure shown in an easy to read two-line backlit LCD display that provides all the necessary system information at a glance.

Automatic voice prompts in plain, easy to understand language (multiple languages available) for status indications and normal operation completes the simplicity of use.

HomeLogiX™ Security System can be armed and disarmed from anywhere, conveniently, over the phone. Scheduled arming per day of week is also available. Our systems can also be controlled by a keychain remote which includes a panic button that can alert the police when necessary.

Textual, vocal and chime notification for every zone

User initiated message recording and playback